
PRODUCT INFORMATION



Performance Pro

This ink series is a modern series designed to achieve an excellent rub resistance on critical substrates. It is mineral oil-free, semi-duct fresh and formulated based on renewable raw materials.


PROPERTIES

- Suitable for all types of perfecting machines
- Suitable for absorbent substrates
- Good printability
- Good deinkability
- Superb rub resistance
- Medium setting
- Fast drying
- Superb ink/water balance
- Not recommended for printing on food contact materials (FCM)
- This ink series is suitable for printing with 'Blauer Engel' (DE-UZ 195)

STANDARDS

- Conforms to the requirements of ISO 2846 and ISO 12647-2 and achieves a neutral grey balance with corresponding tonal range
- Suitable for manufacturing toys in accordance with the general chemical safety requirements in Annex II of the Toy Safety Directive 2009/48/EC and the migration limits specified in the standard EN 71-3

PROPERTIES

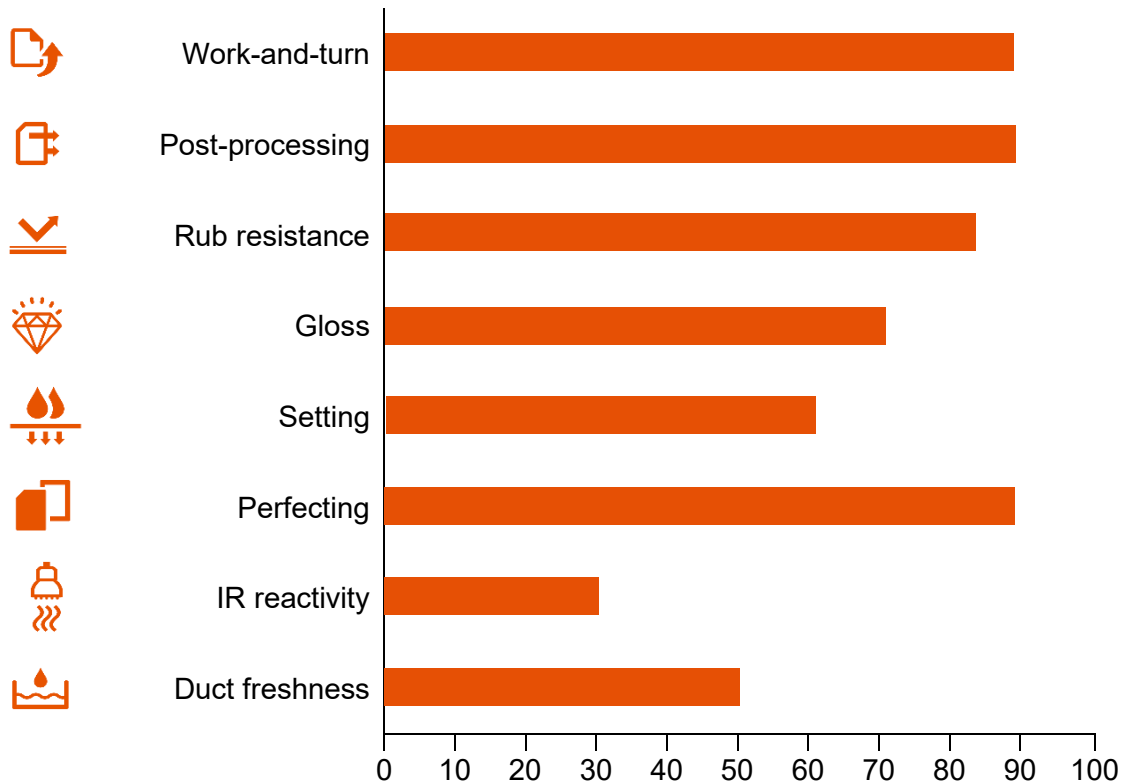

FASTNESSES

		Item No.	Light	Transp	Spirit	Nitro	Alkali
Performance Pro	Y	139005	5	+	+	+	+
Performance Pro	M	139006	5	+	+	+	-
Performance Pro	C	139007	8	+	+	+	+
Performance Pro	B	139008	8	-	+	+	+

+ Eigenschaft gegeben - Eigenschaft nicht gegeben

PRINTING ADDITIVES

Additive	No.	Dosage
Extrafit Ink Reducer	071	max. 5 %
Extrafit Ink Gel	348	max. 5 %
Extrafit Ink Drier	2001	max. 5 %

STORAGE

- Protect from frost, heat and direct sunlight
- Storage only in original containers at 10 - 30 °C
- Unopened and stored correctly, the product has a shelf life of 24 months from the date of delivery

Note: This technical description is intended to inform and advise you. It corresponds to our current state of knowledge. However, since the specific application depends on a number of factors over which we have no influence, no guarantee and liability for a printing failure can be derived.