

---

**PRODUCT INFORMATION**

---

## **Poster Series**


The production of posters for outdoor area puts high demands on the printing ink. The light fastness should be minimum WS (wool scale) 6 (ISO 2835) or even higher.

The Poster Series is characterized by:

- Excellent runnability
- Very good cylinder rolling
- Excellent ink/water balance
- Very fast absorption (therefore no after tack)
- Very high dot sharpness
- High color intensity
- Excellent rub resistance
- Less spray powder necessary
- Suitable for IPA-free printing

This technical instruction sheet is designed for your information and reference. It is based on and conforms to our current knowledge. However as actual application is affected by many factors over which we have no control, we are not liable for printing failures.

## PROPERTIES

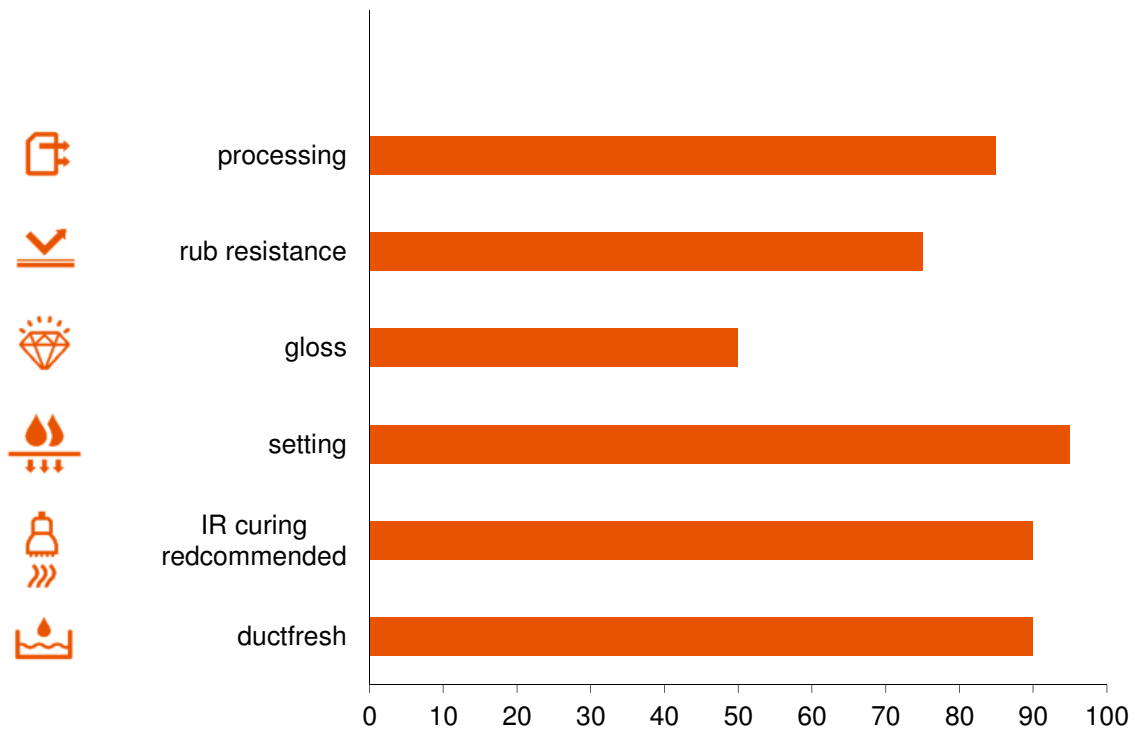

## FASTNESSES

	Item no.	light	transp.	spirit	nitro	alcali
Poster Series Y	70710	6-7	+	+	-	+
Poster Series M	70711	7	+	+	+	+
Poster Series C	70712	8	+	+	+	+
Poster Series K	51003	8	-	+	+	+

+ property given

- property not given

## PRINTING ADDITIVES

Additiv	Item No.	Dosage
Printing Oil	071	max. 5 %
Thinner	455	max. 5 %
Printing Jelly	348	max. 6 %
Rapid Drier liquid	058	max. 3 %
Eppo Drier viscous	2001	max. 3 %